



SMA4728A THRU SMA4764A

1W SURFACE MOUNT SILICON ZENER DIODE

V_Z : 3.3 ~ 100 Volts

P_D : 1 Watt


FEATURES :

- * Complete Voltage Range 3.3 to 100 Volts
- * High peak reverse power dissipation
- * High reliability
- * Low leakage current



MECHANICAL DATA

- * Case : SMA (DO-214AC) Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Lead formed for Surface mount
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.064 gram

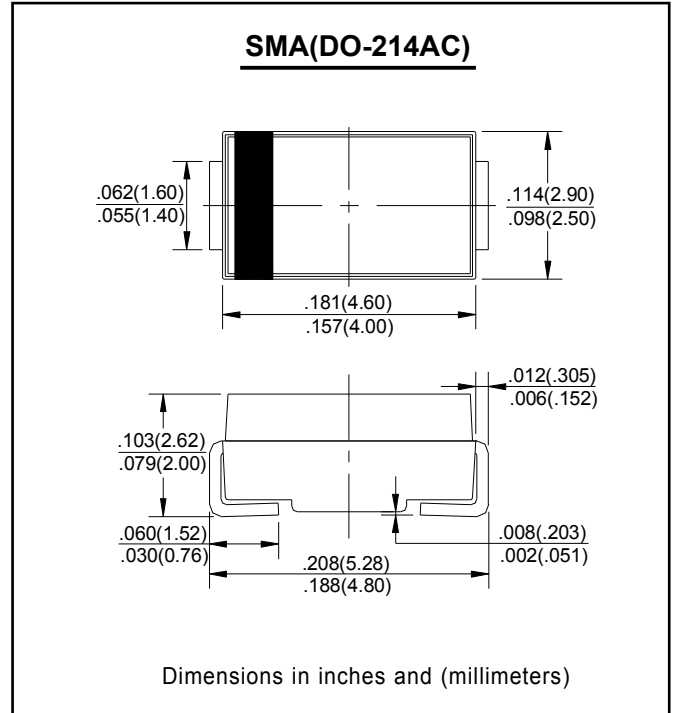


MAXIMUM RATINGS

Rating at 25 °C ambient temperature unless otherwise specified

Rating	Symbol	Value	Unit
DC Power Dissipation at T _L = 50 °C (Note1)	P _D	1.0	Watt
Maximum Forward Voltage at I _F = 200 mA	V _F	1.2	Volts
Junction Temperature Range	T _J	- 55 to + 150	°C
Storage Temperature Range	T _s	- 55 to + 150	°C

Note :

(1) T_L = Lead temperature at 5.0 mm² (0.013 mm thick) copper land areas.

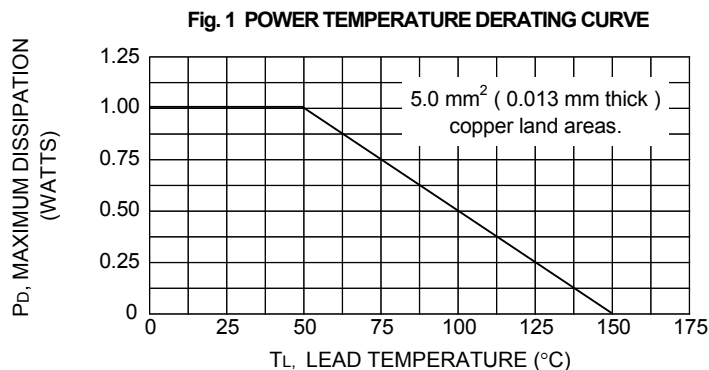



SMA4728A THRU SMA4764A

1W EPITAXIAL ZENER DIODE

Part Number	Nominal Zener voltage	Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Max Surge current
	$V_Z^{(1)}$ at I_{ZT}	I_{ZT}	Z_{ZT} at I_{ZT}	Z_{ZK} at I_{ZK}	I_{ZK}	IR	Test voltage V_R	$I_{RM}^{(2)}$
	V	mA	Ω	Ω	mA	μA	V	mA
SMA4728A	3.3	76	10	400	1	100	1	1380
SMA4729A	3.6	69	10	400	1	100	1	1260
SMA4730A	3.9	64	9	400	1	50	1	1190
SMA4731A	4.3	58	9	400	1	10	1	1070
SMA4732A	4.7	53	8	500	1	10	1	970
SMA4733A	5.1	49	7	550	1	10	1	890
SMA4734A	5.6	45	5	600	1	10	2	810
SMA4735A	6.2	41	2	700	1	10	3	730
SMA4736A	6.8	37	3.5	700	1	10	4	660
SMA4737A	7.5	34	4	700	0.5	10	5	605
SMA4738A	8.2	31	4.5	700	0.5	10	6	550
SMA4739A	9.1	28	5	700	0.5	10	7	500
SMA4740A	10	25	7	700	0.25	10	7.6	454
SMA4741A	11	23	8	700	0.25	5	8.4	414
SMA4742A	12	21	9	700	0.25	5	9.1	380
SMA4743A	13	19	10	700	0.25	5	9.9	344
SMA4744A	15	17	14	700	0.25	5	11.4	304
SMA4745A	16	15.5	16	700	0.25	5	12.2	285
SMA4746A	18	14	20	750	0.25	5	13.7	250
SMA4747A	20	12.5	22	750	0.25	5	15.2	225
SMA4748A	22	11.5	23	750	0.25	5	16.7	205
SMA4749A	24	10.5	25	750	0.25	5	18.2	190
SMA4750A	27	9.5	35	750	0.25	5	20.6	170
SMA4751A	30	8.5	40	1000	0.25	5	22.8	150
SMA4752A	33	7.5	45	1000	0.25	5	25.1	135
SMA4753A	36	7	50	1000	0.25	5	27.4	125
SMA4754A	39	6.5	60	1000	0.25	5	29.7	115
SMA4755A	43	6	70	1500	0.25	5	32.7	110
SMA4756A	47	5.5	80	1500	0.25	5	35.8	95
SMA4757A	51	5	95	1500	0.25	5	38.8	90
SMA4758A	56	4.5	110	2000	0.25	5	42.6	80
SMA4759A	62	4	125	2000	0.25	5	47.1	70
SMA4760A	68	3.7	150	2000	0.25	5	51.7	65
SMA4761A	75	3.3	175	2000	0.25	5	56	60
SMA4762A	82	3.0	200	3000	0.25	5	62.2	55
SMA4763A	91	2.8	250	3000	0.25	5	69.2	50
SMA4764A	100	2.5	350	3000	0.25	5	76.0	45

Notes :

- (1) The type number listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$.
- (2) The reverse surge current is a non-repetitive, 8.3ms pulse width square wave or equivalent sine-wave superimposed on I_{ZT} per JEDEC Method